




Administrative Advisory

Parker Hannifin Corporation
Industrial Hose Division
17295 Foltz Industrial Pkwy
Strongsville, OH 44149
Telephone: (440) 268-2120
Fax: (440) 268-2230
www.safehose.com

PRODUCT UPDATE

Series 7563 Dynaflex[®] PVC Suction & Discharge Hose Increased Wall Thickness

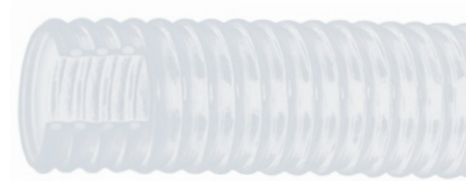

Parker Series 7563 now features increased wall thicknesses and a more robust construction. Series 7563 remains a heavy-duty hose that complies with all applicable FDA requirements for food handling. The smooth tube is excellent for transferring powder, pellets, or other dry materials without build-up. The clear PVC construction permits visual observation of materials being conveyed.

This is a running change. New product will be shipped only after current inventory of comparable hose sizes is depleted. There are no changes to part numbers, working pressures, pricing or stock status.

(Continued on page 2)

PB 2009.11.021 Series 7563 Product Update

ENGINEERING YOUR SUCCESS.




Parker Hannifin Corporation
Industrial Hose Division

Administrative Advisory

Page 2

Series 7563 Dynaflex® PVC Suction & Discharge Hose Increased Wall Thickness

Tube: Clear smooth PVC
Reinforcement: Clear PVC helix
Cover: Clear corrugated PVC
Temp Range: -5°F to +140° (-21°C to + 60°C)
Brand Type: None
Brand Example: None
Industry Standards: FDA
Design Factor: 3:1
Compare To: Gates 201CR; Jason 4660; Kanaflex 200SFG; Kuriyama WT; Pacific Echo 145; Petzetakis 12426SE; Superflex 9000; Veyance Nutriflex

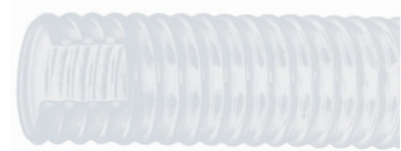

Part Number	ID (in)	PREVIOUS				NEW			
		OD (in)	OD (mm)	Approx Wt (lbs)/100 ft	Min Bend Rad (in)	OD (in)	OD (mm)	Approx Wt (lbs)/100 ft	Min Bend Rad (in)
7563-1000	1	1.22	31.0	17	2.0	1.30	33.0	21	1.5
7563-1250	1-1/4	1.48	37.6	21	3.0	1.62	41.1	28	2.5
7563-1500	1-1/2	1.84	46.7	34	3.0	1.90	48.3	35	3.0
7563-2000	2	2.36	59.9	50	4.0	2.45	62.2	56	4.0
7563-2500	2-1/2	2.87	72.9	68	5.0	3.00	76.2	77	5.0
7563-3000	3	3.50	88.9	100	6.0	3.60	91.4	110	6.0
7563-4000	4	4.64	117.9	152	8.0	4.65	118.1	180	10.0
7563-6000	6	6.50	165.1	300	12.0	6.70	170.2	370	18.0

Packaging: 100 ft. coils
Couplings: Permanent crimp: refer to CrimpSource at www.safehose.com
 Other coupling options: refer to NAHAD Industrial Hose Assembly Guidelines

WARNING: Non-crimp couplings applied with bands or clamps may reduce the working pressure of the hose assembly to less than that of the maximum rated working pressure of the hose. Refer to the NAHAD Industrial Hose Assembly Specification Guidelines for working pressure information.

If there are any questions please contact
Parker Customer Service toll-free at:

866.810.HOSE (4673)
Strongsville, OH
Eastern USA

800.242.HOSE (4673)
South Gate, CA
Western USA