




aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

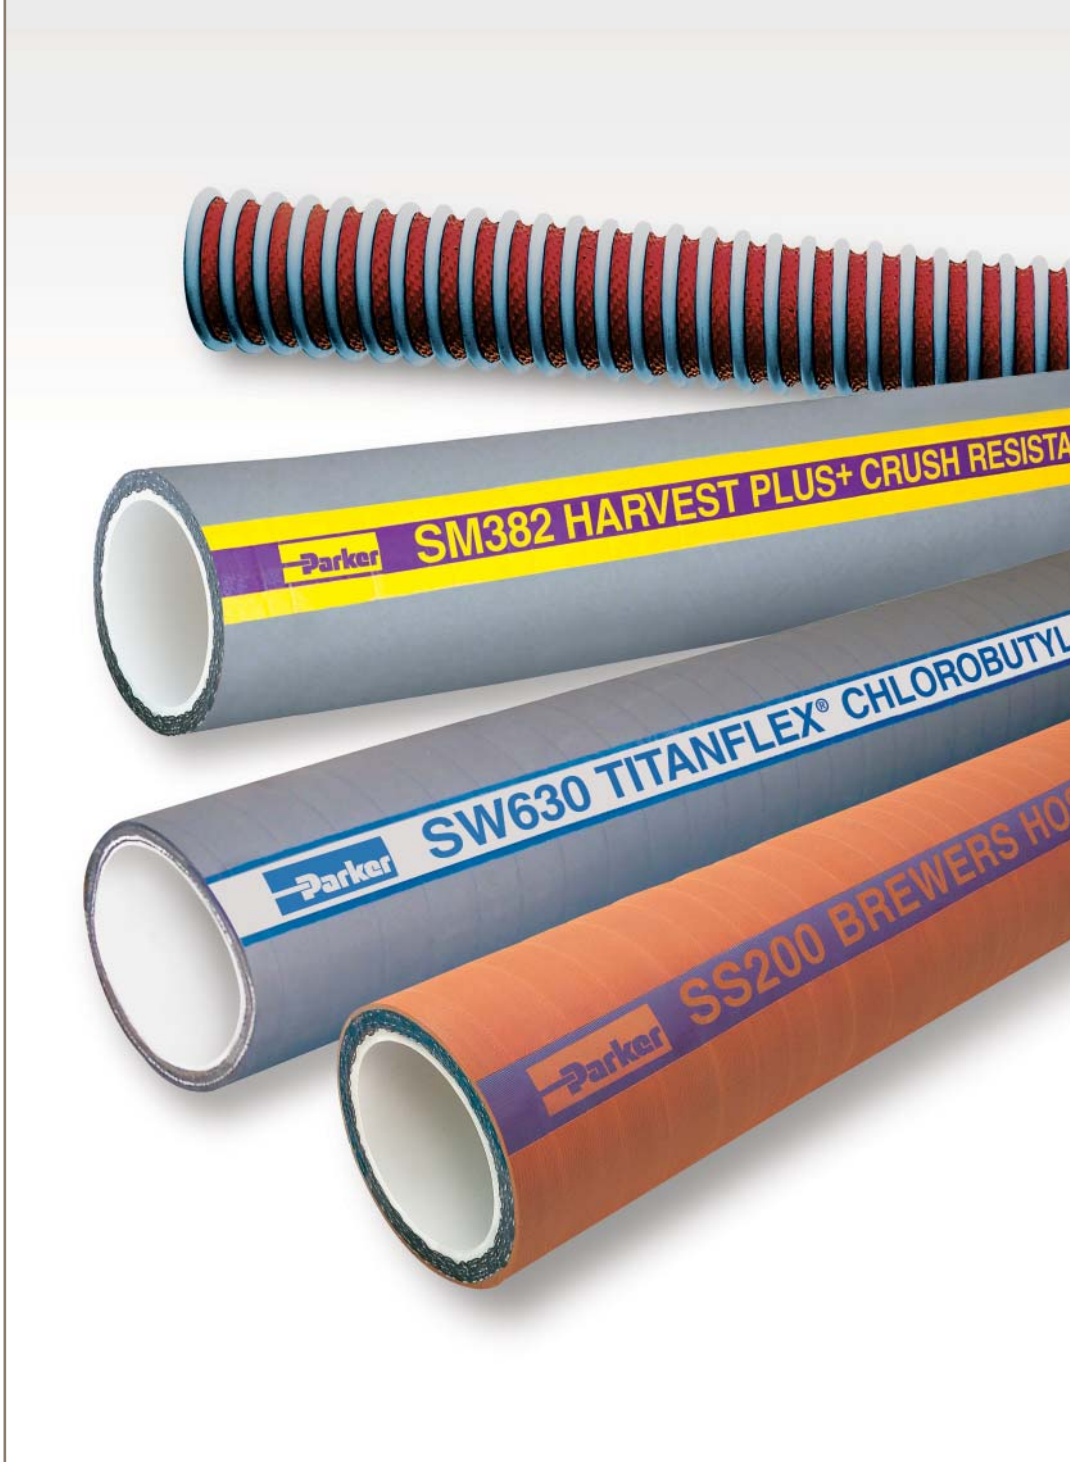

Parker Industrial Hose

Brewery and Winery Hose



ENGINEERING YOUR SUCCESS.

Brewery and Winery Hose

Food Grade Beer and Wine Transfer Hose and Tubing

Parker hoses for the brewery and wine industries meet government and industry sanitary requirements, are flexible, light weight and resilient, accept industry-standard full-flow couplings, and are designed to withstand the rugged cleaning cycles used in beer, wine and food processing systems. Parker hoses provide clean, robust, worry-free service in diverse processing and transfer operations, from the smallest local breweries to the largest national wineries.

Beer brewing and winemaking is an art and a science, requiring a systematic progression of operations. The blending, filtering, stabilizing, preserving, bottling, cleanup and other tasks require the transfer of ingredients and product in equipment or between vessels. Frequently this transfer occurs through rigid stainless steel pipe or tubing. But when a flexible connection is needed for processing, transport or delivery, Parker hose is the taster's choice.



Series SW630 TITANFLEX® Food Suction Hose

- Flexible, Kink Resistant
- FDA, PMO, USDA, 3A

Applications:

- Non-fatty and non-oily foods, beer, liquids, milk, potable water, sanitary products, wine
- Clean-in-place units (contact Parker)
- In-plant transfer; delivery and transport

Working Pressure: 200 psi

Temp Range: -40°F to +225°F (-40°C to +107°C)

Size Range (ID): 1-1/2" to 4" (38.1 mm to 101.6 mm)

Tube: White chlorobutyl

Reinforcement: Multiple textile plies with dual wire helix

Cover: Gray EPDM; wrapped finish



Series SM382 HARVEST PLUS™ Food Suction Hose

- Flexible, Kink Resistant, Crush Resistant
- FDA, PMO, USDA, 3A

Applications:

- Non-fatty and non-oily foods, beer, liquids, milk, potable water, sanitary products, wine
- In-plant transfer; delivery and transport

Working Pressure: 200 to 250 psi

Temp Range: -40°F to +225°F (-40°C to +107°C)

Size Range (ID): 1-1/2" to 4" (38.1 mm to 101.6 mm)

Tube: White chlorobutyl

Reinforcement: Multiple textile plies with dual monofilament helix and dual static wires

Cover: Gray EPDM; wrapped finish



Series SS200 Brewers Discharge Hose

- Heavy Duty, High Pressure, High Temperature
- Distinctive Orange Cover for Easy Identification
- FDA, PMO, USDA, 3A

Applications:

- Non-fatty and non-oily foods, beer, liquids, milk, potable water, sanitary products, wine
- In-plant transfer; delivery and transport

Working Pressure: 350 psi

Temp Range: -40°F to +225°F (-40°C to +107°C)

Size Range (ID): 1-1/2" to 4" (38.1 mm to 101.6 mm)

Tube: White chlorobutyl

Reinforcement: Multiple textile plies

Cover: Orange EPDM



Series SP330 LIGHT-N-BRIGHT™ Food Suction Hose

- Flexible, Kink Resistant, Abrasion Resistant, Light Weight
- FDA, PMO, USDA, 3A

Applications:

- Non-fatty and non-oily foods, beer, liquids, milk, potable water, sanitary products, wine
- In-plant transfer; delivery and transport

Working Pressure: 200 to 250 psi

Temp Range: -40°F to +180°F (-40°C to +82°C)

Size Range (ID): 2" to 4" (50.8 mm to 101.6 mm)

Tube: White chlorobutyl

Reinforcement: Multiple textile plies with dual static wires

Cover: Red synthetic rubber with external gray PVC helix



Series 125 Nexbraid® Reinforced Clear PVC Hose

- Light Weight, Abrasion Resistant
- Continuous View of Product Flow
- FDA, NSF, EU, RoHS, USP

Applications:

- Non-fatty and non-oily foods, beer; liquids, milk, potable water, sanitary products, wine
- In-plant connections and transfer, laboratories in breweries and wineries

Working Pressures: 75 to 250 psi
Working pressures are at 68°F (20°C).
Higher temperatures reduce the available working pressure. Contact Parker.

Temp Range: +25°F to +150°F (-5°C to +65°C)

Size Range (ID): 3/16" to 2" (4.8 mm to 50.8 mm)

Tube: Clear PVC

Reinforcement: Multiple textile plies

Cover: Blue tint PVC; smooth finish



Series 100 Nexclear® Clear PVC Tubing

- Light Duty, Abrasion Resistant
- Continuous View of Product Flow
- FDA, NSF, EU, RoHS, USP

Applications:

- Beer, beverages, potable water, wine
- Air, drain, light vacuum
- Laboratories in breweries and wineries

Working Pressures: 15 to 65 psi
Working pressures are at 68°F (20°C).
Higher temperatures reduce the available working pressure. Contact Parker.

Temp Range: +25°F to +150°F (-5°C to +65°C)

Size Range (in): 1/16" to 3" (1.6 mm to 76.2 mm)

Tube Wall: Clear PVC



Series 7080 HDW™ Creamery Washdown Hose

- White Non-Marking Cover

Applications:

- Hot water, mild chemicals
- Breweries, dairies, food processing plants, wineries
- General washdown
- Not FDA; not for steam service

Working Pressure: 300 psi

Temp Range: -40°F to +212°F (-40°C to +100°C)

Size Range (ID): 3/4" (19.1 mm)

Tube: Black EPDM

Reinforcement: Multiple textile plies

Cover: White EPDM; perforated non-marking smooth finish

