




CUT & COUPLED HOSE ASSEMBLIES

FOR
COMMERCIAL
INDUSTRIAL
CONTRACTORS
FARM/AG



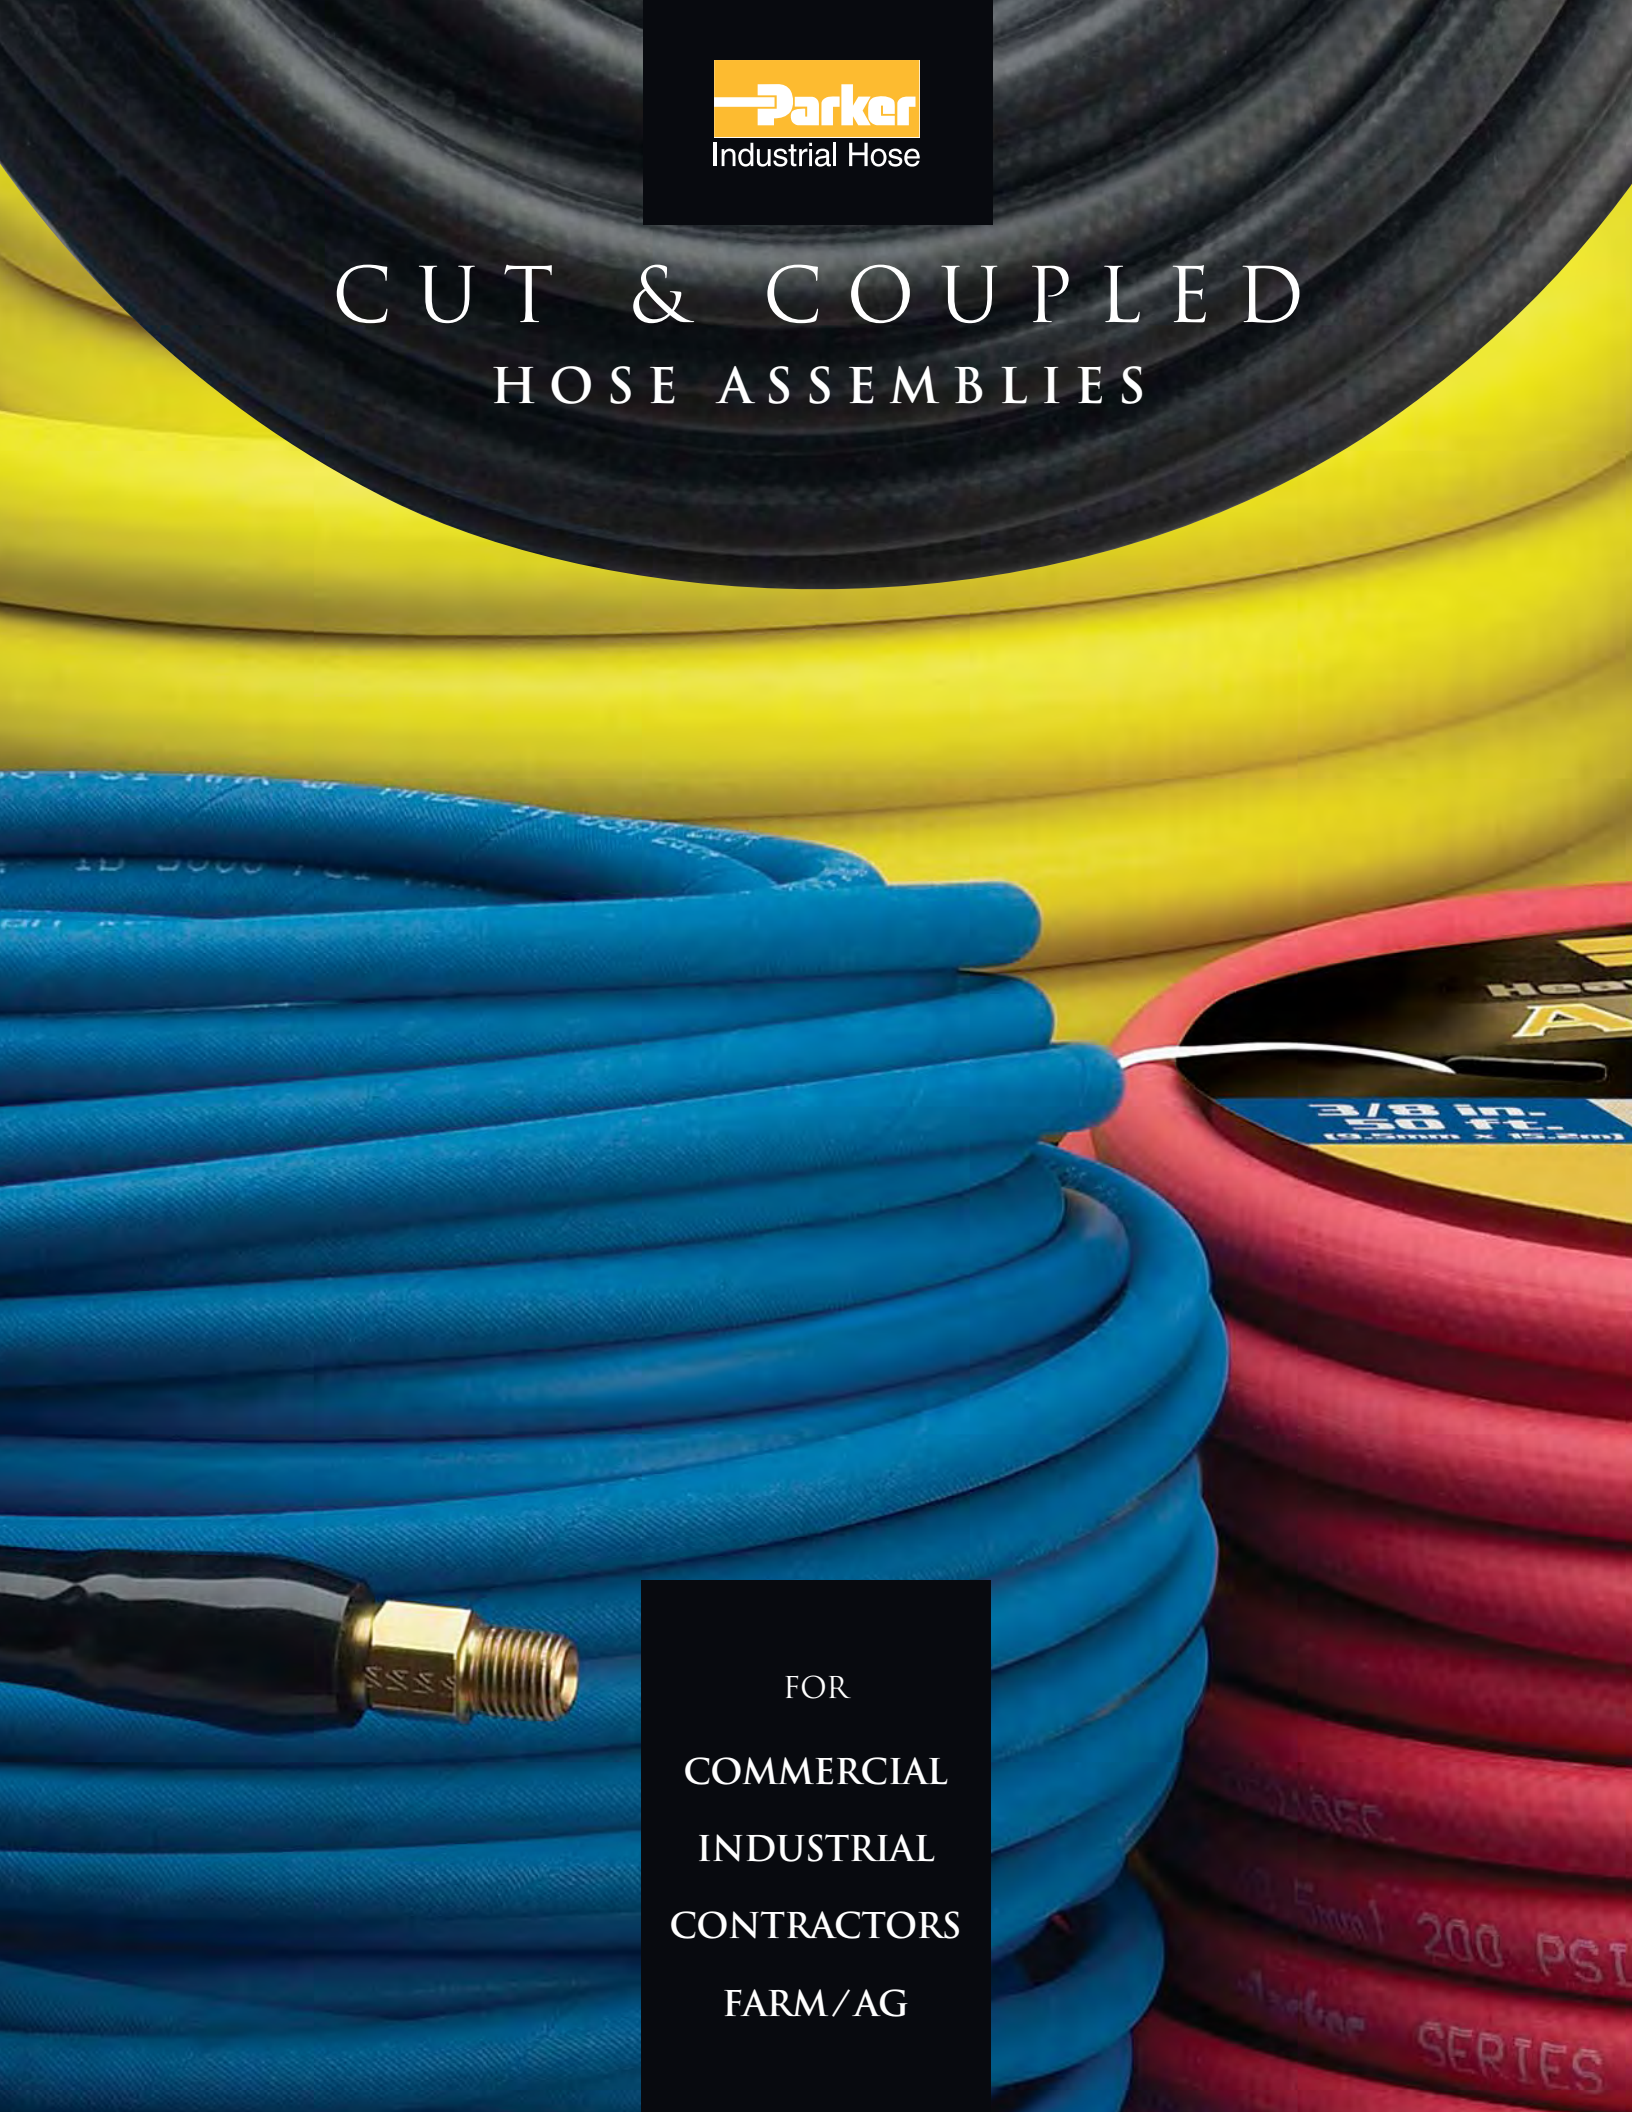

Rubber Air Hose 200 PSI

- Abrasion-resistant EPDM rubber tube & cover
- 2-spiral textile reinforcement
- Working temperature range: -40°F to +212°F
- Strain-relief sleeve, coiled with cardboard discs
- Brass fittings with male 1/4" x 1/4" NPT thread

Part Number	Color	I.D. (in.)	Length (ft.)	Std. Pack	Pack Wt. (lbs.)
7092252-KAD	Red	1/4	25	10	26
7092252-KAC	Red	1/4	50	5	26
7092382-KAD	Red	3/8	25	10	38
7092382-KAC	Red	3/8	50	5	38
7093252-KAC	Black	1/4	50	5	25
7093382-KAC	Black	3/8	50	5	37



Heavy-Duty Rubber Air Hose 300 PSI

- Abrasion-resistant EPDM rubber tube & cover
- Heavy-duty reinforcement
- Working temperature range: -40°F to +160°F
- Strain-relief sleeve
- Brass fittings with male 1/4" x 1/4" NPT threads

Part Number	Color	I.D. (in.)	Length (ft.)	Std. Pack	Pack Wt. (lbs.)
7092253-KAB	Red	1/4	25	10	30
7092253-KAA	Red	1/4	50	5	30
7092383-KAB	Red	3/8	25	10	43
7092383-KAA	Red	3/8	50	5	42
7093253-KAA	Black	1/4	50	5	30
7093383-KAA	Black	3/8	50	5	42



Heavy-Duty Rubber Jiffy® Push-On Air Hose 300 PSI

- Oil-resistant hose, excellent for use with air tools
- Light, flexible and couples in a Jiffy – no clamps or special tools needed
- Working temperature range: -40°F to +212°F
- Flame-resistant cover

Part Number	Color	I.D. (in.)	Length (ft.)	Std. Pack	Pack Wt. (lbs.)
7212BL25-J050	Blue	1/4	50	5	23
7212BL25-J100	Blue	1/4	100	5	45
7212GY25-J050	Gray	1/4	50	5	23
7212GY25-J100	Gray	1/4	100	5	45
7212BL38-J050	Blue	3/8	50	5	30
7212BL38-J100	Blue	3/8	100	3	36
7212GY38-J050	Gray	3/8	50	5	30
7212GY38-J100	Gray	3/8	100	3	36



Commercial-Duty PVC Air Hose 300 PSI

- Flexible, lightweight handling
- Working temperature range: 0°F to +130°F
- Strain-relief sleeve
- Brass fittings with male NPT threads

Part Number	Color	I.D. (in.)	Length (ft.)	Std. Pack	Pack Wt. (lbs.)
33903	Yellow	1/4	25	10	21
33904	Yellow	1/4	50	5	21
33913	Yellow	3/8	25	10	24
33914	Yellow	3/8	50	5	24



Hurricane Pressure Washer Hose 3000 PSI

- Tube: Black Neoprene
- Cover: Black (BK) or non-marking blue (BL) Neoprene
- Reinforcement: One wire braid
- Temperature range: -40° F to 250° F

WARNING! Not for steam service. Not intended for carpet cleaning applications.

Part Number	Color	I.D. (in.)	Length (ft.)	Std. Pack	Pack Wt. (lbs.)
725825BKRS-600	Black	1/4	50	5	35
725825BLRS-600	Blue	1/4	50	5	35
725838BKRS-600	Black	3/8	50	5	50
725838BLRS-600	Blue	3/8	50	5	50



Contractor's Water Hose - Rubber

- 7093 is 200 PSI, 7055 is 100 PSI
- Weather- and abrasion-resistant EPDM rubber
- Heavy-duty reinforcement
- Working temperature range: -40°F to +180°F
- Strain-relief sleeve
- Heavy-duty machined-brass garden-hose-thread fittings

Part Number	Color	I.D. (in.)	Length (ft.)	Std. Pack	Pack Wt. (lbs.)
7093BCWGH-600	Black	3/4	50	3	48
7055GHT63-300	Black	5/8	25	10	44
7055GHT63-600	Black	5/8	50	5	44
7055GHT75-300	Black	3/4	25	6	40
7055GHT75-600	Black	3/4	50	3	40



Jackhammer Hose Standard 200 PSI

- Abrasion-resistant EPDM rubber tube & cover
- Temperature range: -40°F to +212°F
- Available in bulk-packaged quantities
- Premium quality crimped-on universal couplings

Part Number	Color	I.D. (in.)	Length (ft.)	Std. Pack	Wt. (lbs.)
7081JHE75-600	Red	3/4	50	1	14 ea.
7081JHE75-600B	Red	3/4	50	48	14 ea.



Sledgehammer Hose Premium 300 PSI

- Abrasion-resistant EPDM rubber tube & cover
- Temperature range: -40°F to +212°F
- Available in bulk-packaged quantities
- Premium quality crimped-on universal couplings

Part Number	Color	I.D. (in.)	Length (ft.)	Std. Pack	Wt. (lbs.)
7082JHP75-600	Red	3/4	50	1	19 ea.
7082JHP75-600B	Red	3/4	50	48	19 ea.
7083JHP75-600	Yellow	3/4	50	1	19 ea.
7083JHP75-600B	Yellow	3/4	50	48	19 ea.

Twin-Line Welding Hose Assemblies



Grade R (Acetylene Only)

- Tube: Black EPDM
- Cover: Vulcanized Twin: Green (oxygen), Red (acetylene) EPDM
- Reinforcement: Multiple Textile Spirals
- Temperature range: -20°F to +200°F

WARNING – Grade R is for Acetylene fuel gas only! Combining the wrong hose and fuel could lead to premature hose failure, property damage and personal injury.

Part Number	Color	I.D. (in.)	Length (ft.)	Std. Pack	Wt. (lbs.)
7126NLC-150	Red/Green	3/16	12-1/2	10	2 ea.
7126NLC-300	Red/Green	3/16	25	10	4 ea.
7126NLC-600	Red/Green	3/16	50	5	7 ea.
7126NLF-150	Red/Green	1/4	12-1/2	10	2 ea.
7126NLF-300	Red/Green	1/4	25	10	6 ea.
7126NLF-600	Red/Green	1/4	50	5	11 ea.
7126NLM-300	Red/Green	3/8	25	10	8 ea.
7126NLM-600	Red/Green	3/8	50	5	15 ea.



Grade T (All Fuel Gases)

- Tube: Black Neoprene
- Cover: Green (oxygen), Red (fuel gas) Neoprene
- Reinforcement: Multiple Textile Spirals
- Temperature range: -40°F to +200°F

WARNING – If you are using a fuel gas other than acetylene, you should use Grade T hose! Combining the wrong hose and fuel could lead to premature hose failure, property damage and personal injury.

Part Number	Color	I.D. (in.)	Length (ft.)	Std. Pack	Wt. (lbs.)
7109NLC-150	Red/Green	3/16	12-1/2	10	2 ea.
7109NLC-300	Red/Green	3/16	25	10	4 ea.
7109NLC-600	Red/Green	3/16	50	5	7 ea.
7109NLF-150	Red/Green	1/4	12-1/2	10	3 ea.
7109NLF-300	Red/Green	1/4	25	10	6 ea.
7109NLF-600	Red/Green	1/4	50	5	11 ea.
7109NLM-300	Red/Green	3/8	25	10	8 ea.
7109NLM-600	Red/Green	3/8	50	5	16 ea.



Point-of-Purchase Display

This three-sided 58" H x 32" W display rack is constructed with sturdy melamine plastic and is set on casters for easy mobility. With three levels of display shelves and removable upper signage, this unit effectively showcases Parker's cut and coupled hose offering and is versatile enough to use for future product displays.

Parker
Industrial Hose

Parker Hannifin Corp.
Industrial Hose Division
Strongsville, OH
www.parker.com/indhose
Toll Free IHP Customer Service:
(866) 810-HOSE
(866) 810-4673